

IK07

CRI > 80

MONTUR S P 30 LED

3000 K

LED 6.3W / 960lm / 350mA

320mm 6 232 432 83 ◇

8.3 ◇= B

INCL. 1 x CABLE 3 x 18 AWG 6' 120V / 60Hz

IP55 WET

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



JUNCTION BOX

5"-1/2 x 5"-1/2 x 6"-13/16

6 216 12 00

IP67 CONNECTOR 3P

Ø 1"1/16 x 6"5/8

6 216 12 02





PLATE 3


3"-3/8 x 3"-3/8 x 9"-11/16

229 02 03




150mm
5"-15/16

150mm
5"-15/16

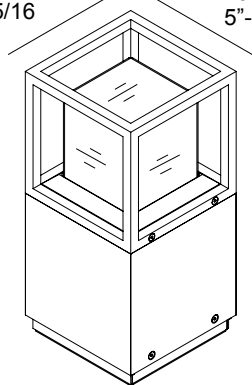

320mm
12"-5/8

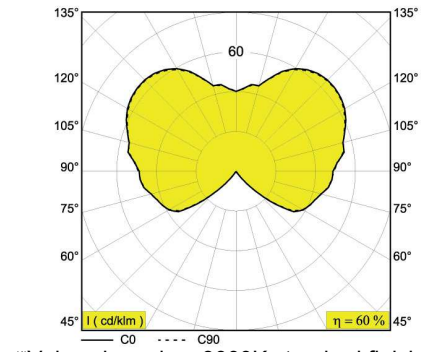

(1) Values based on 3000K standard finish

Application

For indoor and outdoor use
Floor surface mounted.

Color Finish

B - Black

Light Source

One Max. 6,3W LED included

Delivered Lumens

576lm at 3000K(1) at 350mA

Power Supply

Electronic power supply included.
120V input, 350mA current controlled

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Suitable for dry, damp and wet location
Dust-tight - Protected against waterjets → IP55
Weight: 8,3lbs 3,31 kg

Dimensions

Height: 320mm = 12"-5/8
Length: 150mm = 5"-15/16
Width: 150mm = 5"-15/16

PROJECT INFO

Date

Client

Project Name

Type/Quantity

IK07

CRI > 80

MONTUR S P 65 LED

3000 K

LED 6.3W / 960lm / 350mA

670mm 6 232 472 83 ◊
12.4 ◊= B

INCL. GLASS OPAL
INCL. 1 x CABLE 3 x 18 AWG 6'
120V / 60Hz

IP54 WET

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



JUNCTION BOX
6 216 12 00

5"-1/2 x 5"-1/2 x 6"-13/16

IP67 CONNECTOR 3P
6 216 12 02

Ø 1"-1/16 x 6"-5/8






PLATE 3
229 02 03


3"-3/8 x 3"-3/8 x 9"-11/16



150mm 5"-15/16
150mm 5"-15/16

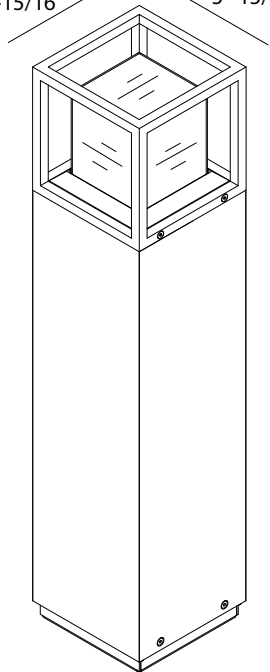

670mm
26"-3/8

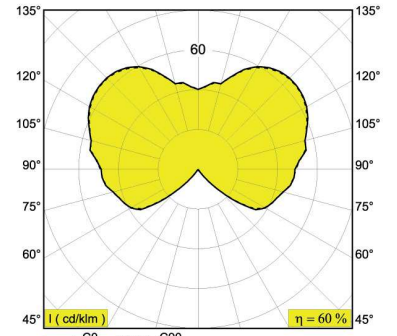

(1) Values based on 3000K standard finish

Application

For indoor and outdoor use
Floor surface mounted.

Color Finish

B - Black

Light Source

One Max. 6,3W LED included

Delivered Lumens

576lm at 3000K⁽¹⁾ at 350mA

Power Supply

Electronic power supply included.
120V input, 350mA current controlled

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Suitable for dry, damp and wet location
Dust-tight - Protected against waterjets → IP54
Weight: 12.4lbs 3,31 kg

Dimensions

Height: 670mm = 26"-3/8
Length: 150mm = 5"-15/16
Width: 150mm = 5"-15/16

PROJECT INFO

Date

Client

Project Name

Type/Quantity

IK07

CRI > 80

MONTUR S P 90 LED

3000 K

LED 6.3W / 960lm / 350mA

920mm | 6 232 492 83 ◊
◊ = B

INCL. GLASS OPAL
INCL. 1 x CABLE 3 x 18 AWG 6'
120V / 60Hz

IP55 WET

FULL INFO TECHNICAL CHAPTER

OPTIONS

INSTALLATION



JUNCTION BOX 5"-1/2 x 5"-1/2 x 6"-13/16
6 216 12 00

IP67 CONNECTOR 3P Ø 1"-1/16 x 6"-5/8
6 216 12 02




PLATE 3 3"-3/8 x 3"-3/8 x 9"-11/16
229 02 03

Application

For indoor and outdoor use
Floor surface mounted.

Color Finish

B - Black

Light Source

One Max. 6,3W LED included

Delivered Lumens

576lm at 3000K⁽¹⁾ at 350mA

Power Supply

Electronic power supply included.
120V input, 350mA current controlled

Specification features

Housing fabricated of powder coated steel, powder coated steel trim
Suitable for dry, damp and wet location
Dust-tight - Protected against waterjets → IP54
Weight: 15.4lbs 3,31kg

Dimensions

Height: 920mm = 36"-1/4
Length: 150mm = 5"-15/16
Width: 150mm = 5"-15/16

PROJECT INFO

Date _____

Client _____

Project Name _____

Type/Quantity _____

