


NEW

DOT.COM WALLWASH TR

Be it to accentuate pieces of art or to reduce contrasts by enhancing vertical illumination, wallwash lighting has multiple purposes. The made-to-measure trimless Dot.Com Wallwash profile enables you to customize wallwash lighting to your own preferences and to adapt it perfectly to the dimensions of the room.

www.deltalight.us/dotcom
www.deltalight.ca/dotcom

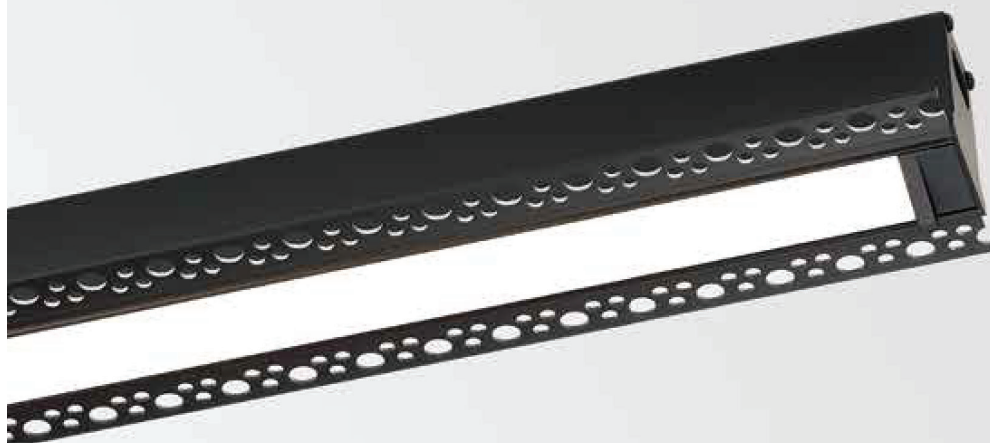


NEW

DOT.COM WALLWASH ON

www.deltalight.us/dotcom
www.deltalight.ca/dotcom




1
PROFILE CONSTRUCTION

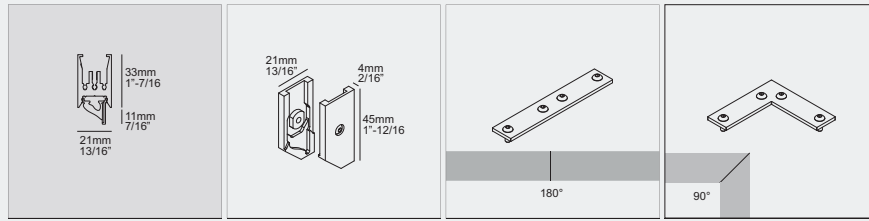


DTC-ON - PROFILE	DTC-ON - END CAP SET	DTC-ON - CORNER 180°	DTC-ON - CORNER 90°
6 16312 0000 ◊	16312 0310 ◊	16312 0620 ◊	16312 0630 ◊
◊ B / W	◊ B / W		
MAX.L / PROFILE: 13'-1/2'	SET OF 2 PCS		
22 / 3'	0.2		

2
PROFILE FIXATION

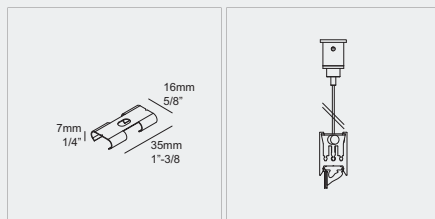

FTL35 - FIXATION SET	FTL35 - SUSP SINGLE 1,6
391 06 11	6 391 09 01
SET OF 2 PCS	L 5'
0.2	0.2

3
PROFILE CONNECTION

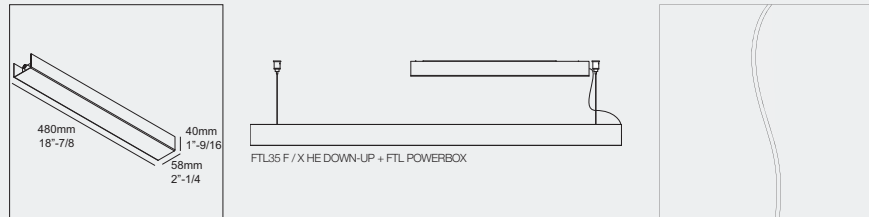

FTL POWERBOX		CURRENT SUPPLY L5'
24V-DC / 60W DIM1	24V-DC / 90W DIM1	6 391 97 51
6 300 24 060 ED1 ◊	6 300 24 90 ED1 ◊	2 x 18 AWG - L5'
◊ B / W		0.2

120-277V / 60Hz

4
LIGHT MODULES



LEDFLEX IN
SUITABLE FOR LEDFLEX IN PAG PRO 664

PRO

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819
 NO LEDFLEX OUT FOR: FEMTOLINE W D/U, KASKADE (LEDFLEX IN MAX 15W/M) AND DOT.COM WALLWASH TR

LEDFLEX



5m / 16'-3/8"- 24V-DC MOUNTED

0.7

WHITE

NEW TW

NEW RGB

24V-DC / ^{Class 2}						
		Dividable per 100mm / 4" 70 smd LED/m	Dividable per 50mm / 2" 140 smd LED/m	Dividable per 33,3mm / 1"-1/4 180 smd LED/m	Dividable per 100mm / 4" 60 smd LED/m	
		5,1W/3' 650lm/3'	15,1W/3' 1400lm/3'	21,6W/3' 2100lm/3'	14,4W/3' 1350lm/3'	14,4W/3'
CRI > 90		LEDFLEX	LEDFLEX FP	LEDFLEX HP*	LEDFLEX TW	LEDFLEX RGB
4000K ●						
DAMP	IN	300 91 52 94	300 91 53 94	600 91 54 94		
WET	OUT (IP65)	300 91 62 94	300 91 63 94			
3500K ●						
DAMP	IN	300 91 52 95	300 91 53 95	300 91 54 95		
WET	OUT (IP65)	300 91 62 95	300 91 63 95			
3000K ●						
DAMP	IN	300 91 52 93	300 91 53 93	300 91 54 93		
WET	OUT (IP65)	300 91 62 93	300 91 63 93			
2700K ●						
DAMP	IN	300 91 52 92	300 91 53 92	300 91 54 92		
WET	OUT (IP65)	300 91 62 92	300 91 63 92			
2700K ● ▶ 5700K ●						
DAMP	IN				21031 0010	
WET	OUT (IP65)					
RGB ●						
DAMP	IN					300 91 53 33
WET	OUT (IP65)					300 91 63 33


LED POWER SUPPLY / INFO PAG TEC

24V-DC / 96W DIM1 6 300 89 24 96 ED1	max.61'-11/16 (max.9' / Powerline)	max.20'-11/16 (max.9' / Powerline)	max.14'-7/16 (max.9' / Powerline)	max.21'-27/32 (max.9' / Powerline)	max.21'-11/16 (max.9' / Powerline)
24V-DC / 96W DIM8 6 300 89 24 96 ED8	max.61'-11/16 (max.9' / Powerline)	max.20'-11/16 (max.9' / Powerline)	max.14'-7/16 (max.9' / Powerline)	max.21'-27/32 (max.9' / Powerline)	max.21'-11/16 (max.9' / Powerline)

RGB DRIVER / INFO PAG TEC

12/24V-DC 72/96W 6 300 90 301				*use in combination with Led Power Supply 24V-DC	*use in combination with Led Power Supply 24V-DC
---	--	--	--	--	--

LEDFLEX HP
 ONLY IN FREE STANDING PROFILES



DIM1: dimming by 0-10V
DIM8: mains dimmable
 *±/- 5%

A photograph of a white wall in a room. On the wall, the word "DOGG" is spelled out using large, white, cut-out letters. The letters are arranged in two rows: "D" and "O" in the top row, and "G" and "G" in the bottom row. The letters are slightly offset from each other, creating a 3D effect. The room has white walls and a white ceiling with a recessed light fixture. The floor is covered with a light-colored, textured carpet.

#WEAREDELTALIGHT

OTMM