

SHELFLINE 20 ST

A series of miniature profiles, to be finished with the ledflex of your choice. Ideal to softly enlighten shelves, cupboards, wardrobes or for other indirect lighting applications.

www.deltalight.us/shelfline20st
www.deltalight.ca/shelfline20st



SHELFLINE 18

www.deltalight.us/shelfline18
www.deltalight.ca/shelfline18




SHELFLINE 19

www.deltalight.us/shelfline19
www.deltalight.ca/shelfline19



1

PROFILE CONSTRUCTION

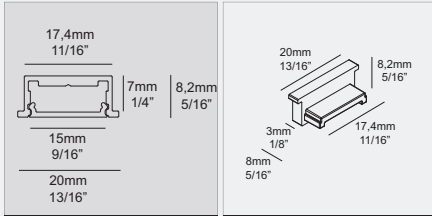

SHL20 ST - PROFILE

6 398 01 00 ◊

◊ ANO


SHL20 ST - END CAP SET

398 01 03 01 ◊

◊ A

MAX.L / PROFILE: 9' 10"-1/8
INCL.PC SBL

SET OF 2 PCS

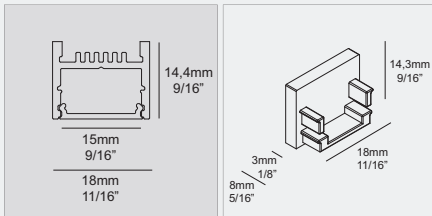

SHL18 - PROFILE

6 398 02 00 ◊

◊ ANO


SHL18 - END CAP SET

398 02 03 01 ◊

◊ A

MAX.L / PROFILE: 9' 10"-1/8
INCL.PC SBL

SET OF 2 PCS

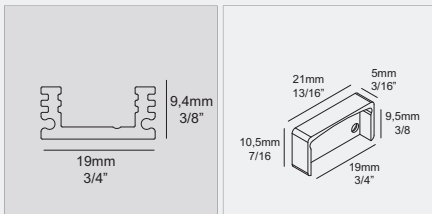

SHL19 - PROFILE

6 398 03 00 ◊

◊ ANO

SHL19 - END CAP SET

398 03 03 01 ◊

◊ A

SHL19-PC CLEAR 9' 10"-1/8

398 03 05 CL

SHL19-PC SBL 9' 10"-1/8

398 03 05 SBL


MAX.L / PROFILE: 9' 10"-1/8
EXCL.PC

SET OF 2 PCS

L: 9' 10"-1/8

2

PROFILE FIXATION



SHL18-MOUNTING CLIP

398 02 06 11


SET OF 10 PCS



SHL18-MOUNTING CLIP 45°

398 02 06 45


SET OF 10 PCS

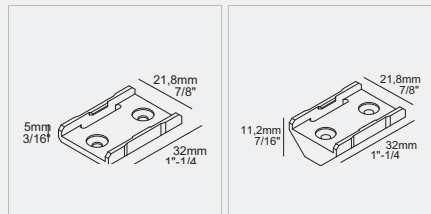

SHL19-MOUNTING CLIP

398 03 06 11

SET OF 10 PCS



SHL19-MOUNTING CLIP 45°

398 03 06 45

SET OF 10 PCS

3

MODULES



LEDFLEX IN

OPTIONS
LEDFLEX IN
ALL INFO PAG TEC 10-11

PRO

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819
 NO LEDFLEX OUT FOR: DOT.COM WALLWASH TR

LEDFLEX



5m / 16'-3/8- 24V-DC MOUNTED

0.7

WHITE

NEW TW

NEW RGB

		24V-DC / ^{Class 2}				
		Dividable per 100mm / 4" 70 smd LED/m	Dividable per 50mm / 2" 140 smd LED/m	Dividable per 33,3mm / 1"-1/4 180 smd LED/m	Dividable per 100mm / 4" 60 smd LED/m	
		5,1W/3' 650lm/3'	15,1W/3' 1400lm/3'	21,6W/3' 2100lm/3'	14,4W/3' 1350lm/3'	14,4W/3'
CRI > 90		LEDFLEX	LEDFLEX FP	LEDFLEX HP*	LEDFLEX TW	LEDFLEX RGB
4000K ●						
DAMP	IN	300 91 52 94	300 91 53 94	600 91 54 94		
3500K ●						
DAMP	IN	300 91 52 95	300 91 53 95	300 91 54 95		
3000K ●						
DAMP	IN	300 91 52 93	300 91 53 93	300 91 54 93		
2700K ●						
DAMP	IN	300 91 52 92	300 91 53 92	300 91 54 92		
2700K ● ▶ 5700K ●						
DAMP	IN				21031 0010	
RGB ●						
DAMP	IN					300 91 53 33
						300 91 63 33


LED POWER SUPPLY / INFO PAG TEC

24V-DC / 96W DIM1 6 300 89 24 96 ED1	max.61'-11/16 (max.9' / Powerline)	max.20'-11/16 (max.9' / Powerline)	max.14'-7/16 (max.9' / Powerline)	max.21'-27/32 (max.9' / Powerline)	max.21'-11/16 (max.9' / Powerline)
24V-DC / 96W DIM8 6 300 89 24 96 ED8	max.61'-11/16 (max.9' / Powerline)	max.20'-11/16 (max.9' / Powerline)	max.14'-7/16 (max.9' / Powerline)	max.21'-27/32 (max.9' / Powerline)	max.21'-11/16 (max.9' / Powerline)

RGB DRIVER / INFO PAG TEC

12/24V-DC 72/96W 6 300 90 301				*use in combination with Led Power Supply 24V-DC	*use in combination with Led Power Supply 24V-DC
---	--	--	--	--	--

LEDFLEX HP
 ONLY IN FREE STANDING PROFILES



DIM1: dimming by 0-10V
DIM8: mains dimmable
 *±/- 5%

